



REQUEST FOR BOARD ACTION

ITEM NO. 3.

DATE OF MEETING: October 17, 2011

REQUESTED BY: Pender County Schools

SHORT TITLE: Resolution Authorizing a Contract with and Purchase Order to Seegars Fence Company, in the amount of \$14,234 for Fencing of the New Topsail High School Softball Field

BACKGROUND: Pender County schools are requesting approval of a contract with and purchase order to Seegars Fence Company in the amount of \$14,234 for fencing around the new softball field at Topsail High School. After closing out completed purchase orders for the Topsail High School project, funding still remains and the schools propose to use these funds to pay for this fencing.

The schools solicited bids for this work and received three (3) responses as outlined in the attached letter. At this time they are requesting approval of the bid from Seegars Fence Company.

The County and Schools have entered into the appropriate agreements to permit the County to pay the bills associated with this construction in order to recapture the sales taxes paid and realize a substantial savings.

SPECIFIC ACTION REQUESTED: To consider a resolution authorizing a contract with and purchase order to Seegars Fence Company for fencing around the new softball field at Topsail High School.

COUNTY MANAGER'S RECOMMENDATION

Respectfully recommend approval.

RB
Initial

RESOLUTION

NOW, THEREFORE BE IT RESOLVED that

a contract with and purchase order to Seegars Fence Company., is hereby authorized in the amount of \$14,234 for fencing around the new softball field at Topsail High School. The County Manager/Chairman shall have the authority to execute any/all documents necessary to implement this resolution.

Account #: 63-406457

Topsail High School Project

AMENDMENTS:

MOVED _____ SECONDED _____

APPROVED _____ DENIED _____ UNANIMOUS

YEA VOTES: Brown ___ Tate ___ Rivenbark ___ Ward ___ Williams ___

George R. Brown, Chairman 10/05/11
Date

ATTEST 10/05/11
Date



Board of Education
Katherine Hering, Chairman
Karen Rouse, Vice-Chairman
Karen Gonzales
Kenneth I. Lanier, Jr.
Tom Roper

Rachel Manning
Superintendent

September 29, 2011

Rick Benton
Pender County Manager
805 South Walker Street
Burgaw, NC 28425

RE: Fencing for Topsail High School Softball Field

Attached are the bids for the Installation of fencing for the new Topsail High School Softball Field. We received bids from the following contractors:

<u>Vendor</u>	<u>Vendor Address</u>	<u>Bid Price</u>
Seagars Fence Com	Wilmington, NC	\$14,234.00
Matt David,CFP	Wilmington, NC	\$15,055.00
McCall's Hurricane Fence Co.	Wilmington, NC	\$15,547.00

We are pleased with these bids and are requesting that the Pender County Commissioners approve so that we may begin installation of the fence.

We are recommending that Seagars Fence Co. be awarded the project and that a purchase order be issued in the amount of \$14,234.00. This will come out of bond money for Topsail High School.

Thank you and the commissioners for all you do for Pender County Schools. If there are any questions call or e-mail me at your convenience.

David Smith
Pender County Schools

925 Penderlea Highway • Burgaw, North Carolina 28425
Telephone (910) 259-2187 • Fax (910) 259-0133
www.pendercountyschools.net

Pender County Schools . . . the future in progress

Since 1949
SEEGARS
 FENCE COMPANY

Demand the Best.

P.O. Box 7006 Wilmington, NC 28406
 Phone: (910) 343-8246
 Fax: (910) 343-8475
 www.SeegarsFence.com



CHAIN LINK -- WOOD -- ORNAMENTAL -- PVC -- ACCESS CONTROL -- RESIDENTIAL -- INDUSTRIAL

PROPOSAL: Submitted To: Topsail High School Street: City, State:	Date: September 27, 2011 Bid No.: J3098 Job Name: Topsail High School Softball Field Job Location: Hampstead Phone No.: Fax No:
*** REVISED PROPOSAL ***	
Attention: David Smith david_smith@pender.k12.nc.us 910-633-3572	
Furnish and Install Option(s) chosen from below:	
1	<u>20' Tall Back Stop with 4' overhang:</u> Install 60 linear feet of 20' tall - 9 gauge - galvanized chain link fence, consisting of (3) rows of 7' tall - 9 gauge - galvanized chain link fence, 4" Sch40 posts, 1-5/8" Sch40 rail, 4' tall chain link for over hang.
2	<u>Dug Out Fence:</u> Install 96 linear feet of 8' tall - 9 gauge - galvanized chain link fence, including 3" Sch40 posts, 1-5/8" Sch40, bottom tension wire.
3	<u>Side Lines and Outfield Fence:</u> Install 618 linear feet of 6' tall - 9 gauge - galvanized chain link fence, including (1) 12' double drive gate, (1) 3' walk gate, 3" Sch40 gate posts, 2-1/2" terminal posts, 1-5/8" Sch40 top rail, bottom tension wire. PRICE: \$14,234.00
4	<u>Foul Poles:</u> Install (2) 18' Foul Poles, made from 3" Sch40 posts, 1' leaf on top framed out with chain link and pipe. Also all of these materials will be Powder Coated "Yellow". PRICE: \$ 873.00
5	<u>Safety Guard - Yellow - Corrugated Poly Pipe:</u> Install 370 linear feet of Safety Guard - Yellow - Corrugated Poly Pipe, on top of out field fence. PRICE: \$ 1,176.00
All posts will be set in concrete footers. Area of work must be cleared and free of any obstructions that may slow installation of fence. Area is to be marked prior to installation of fence. Please notify Seegars Fence of any changes to above proposal.	
Price:	\$ _____ - Dollars
Terms:	30 day terms.
We Propose: To Furnish Materials, Tax and Labor in Accordance with the Above Specifications. It shall be the Responsibility of the OWNER to advise our workers of the locations of ANY private underground Cables, Lines, Utilities, Etc. If such is not marked, the OWNER is responsible for any resulting damage. The Bid is also based on the fence right of way being cleared, grade with lines and corners established by OWNER. If proposed fence line is within 30" of marked Underground Utilities, Either the Fence line will be moved or OWNER will be fully responsible for any damage that occurs while digging said fence line. Extra Charges may apply for underlying Rock or Slabs that necessitate Jack Hammering, Etc. Customer will be responsible for all collection costs associated with unpaid Invoices. There will be a 1.5% Interest Charge (per month) on all overdue Invoices.	
All material is guaranteed to be as specified. All work to be completed in a workmanlike manner according to standard practices. Any alteration or deviation from above specifications involving extra costs will be executed only upon written orders, and will become an extra-charge over and/or under the estimate. All agreements contingent upon delays beyond our control. Owner to carry fire, tornado and other necessary insurance. Our workers are fully covered by Workman's Compensation Insurance.	
The above prices, specifications, and conditions are satisfactory and are hereby accepted. You are authorized to do the work as specified. Payment will be made as outlined above.	AUTHORIZED: <u>Jason Riddle</u> ACCEPTANCE SIGNATURE: _____ DATE: _____

Matt Davis, CFP
President/Owner
910-465-8109
matt@davisfence.com

<http://www.davisfence.com>
600 Scotts Hill Loop Road
Wilmington, NC 28411

Name / Address
Pender County Schools 925 Penderlea Hwy Burgaw, NC 28425

Date 9/23/2011

Estimate #
535

Description
To provide a 20' x 20' x 20' back stop 20' tall with a 4' over hang on each wing. All wire is 9 ga and all frame work is ss40 Sales Tax

5834.00
9221.00

15055.00

Total	\$5,834.00
--------------	-------------------

Terms _____

Signature _____

Date _____

I appreciate the opportunity and look forward to working with you.

Matt Davis, CFP
President/Owner

Davis Fence
<http://www.davisfence.com>

910-465-8109
matt@davisfence.com

Matt Davis, CFP
President/Owner
910-465-8109
matt@davisfence.com

<http://www.davisfence.com>
600 Scotts Hill Loop Road
Wilmington, NC 28411

Name / Address
Pender County Schools 925 Penderlea Hwy Burgaw, NC 28425

Date 9/23/2011

Estimate #
536

Description
To provide and install side line and out field fence. 618' of 6' and 96' of 8' with 2 3' walk gates and 1 12' double drive. All wire is 9 ga and all frame work is ss40 2" line post 3" terminal post 1 5/8 top rail and 7ga tension wire. Sales Tax

Total	\$9,221.00
--------------	-------------------

Terms

Signature _____


Date _____

I appreciate the opportunity and look forward to working with you.

Matt Davis, CFP
President/Owner

Davis Fence
<http://www.davisfence.com>

910-465-8109
matt@davisfence.com



McCALL'S HURRICANE FENCE CO. PO Box 2067
 WILMINGTON, NC 28402 910 763 4860

PROPOSAL/CONTRACT

09/20/2011

Customer Information:
 Pender County Schools
 925 Penderlea Hwy
 Burgaw, NC


Job Information:
 Topsail Middle
 New Softball Field Fence

Notes:

- Furnish materials and labor to install softball fence as per sketch, attached specifications and the following:
- 60' 18" high back stop w/ 4' overhang
- 96' 8" high fence w/ (2) 4' openings
- 618' 6" high fence
- 1 12' wide x 6' high double gate
- 2 3' wide x 6' high single gates

Total price for above \$15,547.00
 Alternate w/o 4' overhang \$13,211.00

2 Foul poles

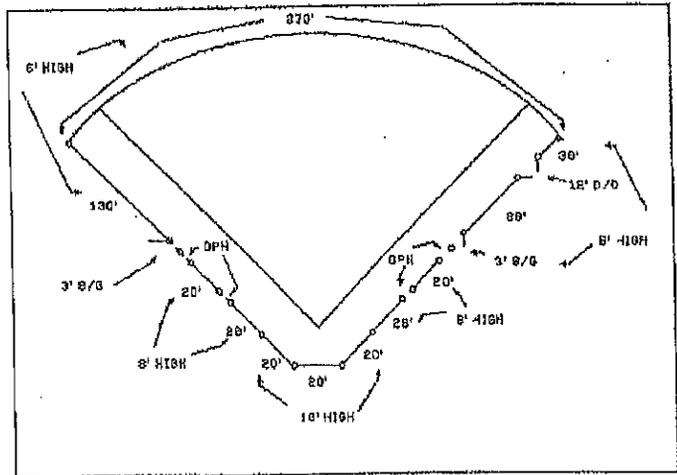

McCALL'S HURRICANE FENCE CO. agrees to guarantee above fence to be free from defects in materials and workmanship for one year. Pressure treated pine NOT guaranteed against warping or checking.

McCALL'S HURRICANE FENCE CO. shall advise the customer as to local zoning regulations but responsibility for complying with said regulations and obtaining any required permits shall rest with the customer. McCALL'S HURRICANE FENCE CO. will assist the customer, upon request, in determining where the fence is to be erected, but under no circumstance does McCALL'S HURRICANE FENCE CO. assume any responsibility concerning property lines or in any way guarantee their accuracy. If property pins cannot be located it is recommended that the customer have the property surveyed.

McCALL'S HURRICANE FENCE CO. will assume the responsibility for having underground public utilities located and marked. However, McCALL'S HURRICANE FENCE CO. assumes no responsibility for unmarked sprinkler lines, or any other unmarked buried lines or objects. The customer will assume all liability for any damage caused by directing McCALL'S HURRICANE FENCE CO. to dig in the immediate vicinity of known utilities.

The final billing will be based on the actual footage of fencing built and the work performed. Adjustments for material used on this job and adjustments for labor will be charged or credited at the currently established rates. Additional charges for any extra work not covered in this contract that was requested by the customer will also be added. The full amount of this contract along with any additional charges will become payable upon completion of all work whether or not it has been invoiced.

A finance charge of 1 1/2% per month (for a minimum of \$1.00), which is an annual percentage rate of 18%, shall be applied to accounts that are not paid within 10 days after completion of any work invoiced. All materials will remain the property of McCALL'S HURRICANE FENCE CO. until all invoices pertaining to this job are paid in full. The customer agrees to pay all interest and any costs incurred in the collection of this debt.

Approved & Accepted for Customer:

Contract Amount: \$ _____
 Down Payment: \$ _____
 Balance Due: \$ _____

Customer _____ Date _____
 Accepted for McCALL'S HURRICANE FENCE CO.:
[Signature] 9/20/11
 Salesperson _____ Date _____
 DENNIS McCALL




McCALL'S HURRICANE FENCE CO.
PO Box 2067
WILMINGTON, NC 28402
910 763 4960

8' High Dugout
+ B Lencher Screen

CHAINLINK FENCE SPECIFICATION

- FABRIC: 96" 9 GA. GALVANIZED (2" Mesh) CHAIN LINK FABRIC.
- TOP RAIL: 1 5/8" O.D. FULL WEIGHT PIPE, 2.27 lbs. per foot. Top rail 21' in length, joined with 1 5/8" SLEEVE.
- LINE POST: 2 3/8" O.D. FULL WEIGHT PIPE, 3.65 lbs. per foot. Line posts set 10' on center maximum spacing. Concrete footing: 9" diameter, 36" depth.
- TERMINAL POST: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.
- BRACING: 1 5/8" O.D. FULL WEIGHT PIPE, 2.27 lbs. per foot, used for the bottom rail.
- FITTINGS: BEVELED BRACE BAND & CARRIAGE BOLT, PRESSED STEEL RAIL-END, PRESSED STEEL EYE-TOP, PRESSED STEEL CAP, 3/16" X 3/4" TENSION BAR, BEVELED TENSION BAND & CARRIAGE BOLT.
- TIE WIRE: 10 1/2" 9 GA. ALUMINUM TIE WIRE & 6 1/2" 9 GA. ALUMINUM TIE WIRE spaced 15" on center for line posts & 24" on center for rails.
- POST FOOTING: HAND MIXED CONCRETE.

Attachment
TOPSAIL Softball Field
9/20/11




McCALL'S HURRICANE FENCE CO.
PO Box 2067
WILMINGTON, NC 28402
910 763 4960

18' High Backstop

CHAINLINK FENCE SPECIFICATION

- FABRIC: 9 GA. GALVANIZED (2" Mesh) CHAIN LINK FABRIC. *Stack (3) 6' High*
- TOP RAIL: 1 5/8" O.D. FULL WEIGHT PIPE, 2.27 lbs. per foot. Top rail 21' in length, joined with 1 5/8" SLEEVE.
- LINE POST: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Line posts set 10' on center maximum spacing. Concrete footing: 16" diameter, 36" depth.
- TERMINAL POST: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 16" diameter, 36" depth.
- BRACING: 1 5/8" O.D. FULL WEIGHT PIPE, 2.27 lbs. per foot, used for the *(2)* middle rail & bottom rail.
- FITTINGS: BEVELED BRACE BAND & CARRIAGE BOLT, PRESSED STEEL RAIL-END, PRESSED STEEL EYE-TOP, PRESSED STEEL CAP, 3/16" X 3/4" TENSION BAR, BEVELED TENSION BAND & CARRIAGE BOLT.
- TIE WIRE: 10 1/2" 9 GA. ALUMINUM TIE WIRE & 6 1/2" 9 GA. ALUMINUM TIE WIRE spaced 15" on center for line posts & 24" on center for rails.
- POST FOOTING: HAND MIXED CONCRETE.

Attachment
Top SAIC Softball Field
9/20/11



McCALL'S HURRICANE FENCE CO.
PO Box 2067
WILMINGTON, NC 28402
910 763 4960

6' High outfield

CHAINLINK FENCE SPECIFICATION

- FABRIC: 72" 9 GA. GALVANIZED (2" Mesh) CHAIN LINK FABRIC.
- TOP RAIL: 1 5/8" O.D. FULL WEIGHT PIPE, 2.27 lbs. per foot. Top rail 21' in length, joined with 1 5/8" SLEEVE.
- LINE POST: 1 7/8" O.D. FULL WEIGHT PIPE, 2.72 lbs. per foot. Line posts set 10' on center maximum spacing. Concrete footing: 8" diameter, 24" depth.
- TERMINAL POST: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.
- GATES: SINGLE SWING GATE: Framework of 1 5/8" FULL WEIGHT PIPE, 2.27 lbs. per foot.
DOUBLE SWING GATE: Framework of 1 5/8" FULL WEIGHT PIPE, 2.27 lbs. per foot.
Gates braced and trussed as necessary. Same fabric as fence.
- GATE POST: SINGLE SWING GATE: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.
DOUBLE SWING GATE: 2 7/8" O.D. FULL WEIGHT PIPE, 5.79 lbs. per foot. Concrete footing: 10" diameter, 36" depth.
- TENSION WIRE: 7 GA. COIL SPRING GALVANIZED TENSION WIRE attached to bottom of fence fabric with 9 GA. STEEL HOG RING spaced 24" on center.
- FITTINGS: BEVELED BRACE BAND & CARRIAGE BOLT, PRESSED STEEL RAIL-END, PRESSED STEEL EYE-TOP, PRESSED STEEL CAP, 3/16" X 3/4" TENSION BAR, BEVELED TENSION BAND & CARRIAGE BOLT.
- TIE WIRE: 8 1/4" 9 GA. ALUMINUM TIE WIRE & 6 1/2" 9 GA. ALUMINUM TIE WIRE spaced 15" on center for line posts & 24" on center for rails.
- POST FOOTING: HAND MIXED CONCRETE.

*Attachment
Top SAIL Softball Field
9/20/11*